
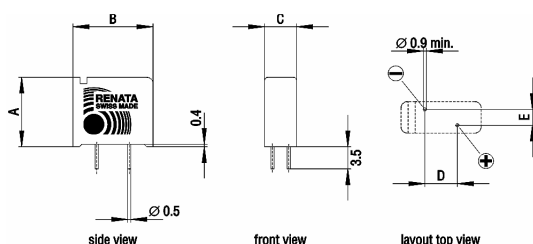


Power Modules

Encapsulated Miniature Batteries Two Pins Vertical



RENATA No.	Nominal capacity (mAh)	Nominal voltage (V)	Encapsulated cell	Weight (g)	Maximum dimensions (mm)				
					A	B	C	D	E
338A	48	3	CR1225	1.69	13.5	15.0	5	7.60	2.54

Operating temperature range:

-40 °C to +85 °C

Self discharge rate:

less than 1% per year at 25 °C

Specifications - module housings:

polyamide 66

- soldering contacts:

Isotan (55% Cu, 44% Ni-Mn)